


# VIDEO CROSS GENERATOR

## 影像十字線處理器

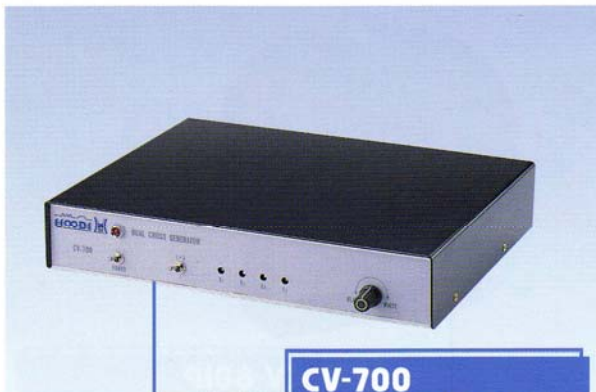

**CV-700**

雙十字線信號產生器

### CV-700 DUAL CROSS GENERATOR

#### SPECIFICATIONS

Video input	: VBS 1 Vp-p, 75 ohm
Video output	: VBS 1 Vp-p, 75 ohm
Electronic cross	: 2 cross line
Grey level adjustment	: Adjustable, by BCD VR
Input voltage	: 117/220 VAC, 50/60 Hz
Power consumption	: 10 Watts
Operating temperature	: -10°C to +50°C
Dimension	: 273(W)x60(H)x219(D)mm
Weight	: 2.5 Kgs



**CV-710/CV-730**

十字線信號產生器 / 有刻度

### CV-710 CROSS LINE GENERATOR

#### SPECIFICATIONS

Video input	: VBS 1 Vp-p, 75 ohm
Video output	: VBS 1 Vp-p, 75 ohm
Electronic cross	: 1 cross line
Grey level	: Adjustable, by BCD SW, +/- 5 lines
Power input	: 117/220V VAC, 50/60Hz
Power consumption	: 10 Watts
Dimension	: 152(W)x58(H)x188(D)mm
Weight	: 1.3 Kgs

### CV-730 CROSS LINE GENERATOR WITH CURSOR

#### SPECIFICATIONS

Video input	: VBS 1 Vp-p, 75 ohm
Video output	: VBS 1 Vp-p, 75 ohm
Electronic cross	: 1 cross line
Grey level	: Adjustable, by BCD SW, +/- 5 lines
Power input	: 117/220V VAC, 50/60Hz
Power consumption	: 10 Watts
Dimension	: 152(W)x58(H)x188(D)mm
Weight	: 1.3 Kgs